

DAKGS-114



4 Ports Dual-Monitor DVI(Dual-Link) KVM Switch with Audio, USB 2.0, Serial, And Hotkey Control

Specifications


| Model Number | | DAKGS-114 |
|-------------------------------|-------------------|---|
| MAX. Resolution | | 2560x1600@60Hz (4:4:4) |
| | | 2560x1440@60Hz (4:4:4) |
| | | 2048x2048@60Hz (4:4:4) |
| | | 1920x1080@60Hz (4:4:4) |
| Computer Interface (4-Port) | USB 2.0 Ports | USB-B x 4 |
| | Video Input | DVI x 4 |
| | Audio Input | 3.5mm Speaker Jack x 4 3.5mm Microphone Jack x 4 |
| | Serial (RS-232) | DB9 x 4 (DCE) |
| Console Interface | USB 2.0 Ports | USB-A x 2 (Rear) |
| | USB HID Ports | USB-A x 2 (Rear) |
| | Video Output | DVI x 1 |
| | Audio Output | 3.5mm Speaker Jack x 1 3.5mm Microphone Jack x 1 |
| | Serial (RS-232) | DB9 x 1 (DTE) |
| Control Methods | | Hotkey / Push Button |
| HDCP Compliance | | HDCP 1.4 (Pass Through) |
| Hot Plug-and-Play | | Yes |
| Push Buttons | | Port-Select x 4 |
| LED Indicators | | PC-Ready x 4, PC-Select x 4, Power x 1 |
| Power supply | | DC 9~12V |
| Operation Environment | | 0~40°C, Humidity<80% |
| Storage Temperature | | -20~60°C |
| H x W x D (mm) | | 60 x 220 x 130 |
| Material | | Metal |
| Weight (g) | | 1235 |

Features

- Allows 4 Computers Share 1 Set of KVM Console
- DVI-Dual-Link Video Supports Most Popular Resolutions Up to 2560x1600, 2048x2048
- HDCP Pass Through Ensures Uninterrupted Video Playback
- EDID Management, Including EDID Copy / Auto EDID, Ensures Display Compatibility
- Serial RS232 Allows Extensive Data Communication
- USB 2.0 Supports Most USB Devices
- 3.5mm Stereo Audio Ports to Connect with Speaker, Headphone, and Microphone
- 2 Flexible Switching Control Methods :
 - Front Push Buttons
 - Hotkey Control
- Manual-Scan and Auto-Scan Functions
- Support Windows, Mac, Linux, Chrome O.S

Product Family

| Model | Computer Ports | DVI | Multi-Monitor | Audio | USB |
|------------|----------------|--|---------------|-------|---------------|
| DAKG-E3122 | 2 | DVI Dual-Link MAX. 2560x1600 @60Hz (4:4:4) | 2 | Yes | USB 3.2 Gen 1 |
| DAKG-142 | 2 | | 4 | | USB 2.0 |
| DAKG-Z142 | 2 | | 4 | | USB HID |
| DAKG-134 | 4 | | 3 | | USB 2.0 |
| DAKG-Z134 | 4 | | 3 | | USB HID |
| DAKG-114 | 4 | | 1 | | USB 2.0 |
| DAKG-Z114 | 4 | | 1 | | USB HID |
| DAKG-112 | 2 | | 1 | | USB 2.0 |
| DAKG-Z112 | 2 | 1 | USB HID | | |
| DADG-142 | 2 | DVI Single-Link MAX. 1920x1200 @60Hz (4:4:4) | 4 | Yes | USB 2.0 |
| DADG-Z142 | 2 | | 4 | | USB HID |
| DADG-134 | 4 | | 3 | | USB 2.0 |
| DADG-Z134 | 4 | | 3 | | USB HID |
| DADG-132 | 2 | | 3 | | USB 2.0 |
| DADG-Z132 | 2 | | 3 | | USB HID |
| DADG-124 | 4 | | 2 | | USB 2.0 |
| DADG-Z124 | 4 | | 2 | | USB HID |
| DADG-122 | 2 | | 2 | | USB 2.0 |
| DADG-Z122 | 2 | | 2 | | USB HID |
| DAAG-114 | 4 | 1 | USB 2.0 | | |
| DAAG-Z114 | 4 | 1 | USB HID | | |
| DAAG-112 | 2 | 1 | USB 2.0 | | |
| DAAG-Z112 | 2 | 1 | USB HID | | |

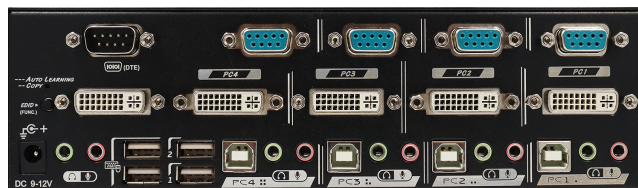

Overview

The 4 Ports DVI-DL KVM Switch, DADG-124, Allows 4 DVI-DL Computers to Share 1 Set of USB KVM Console, Including DVI-DL Video, Speaker, Microphone, USB 2.0, Serial, EDID Copy Function.

Connection pattern

