

DCSHR-005

DCSHR-012





DC Sharer (5V / 12V)

► Specifications

Model Number	DCSHR-005	DCSHR-012
Input*	DC 5V	DC 9~12V
Output	4 x 5V DC outlets 2 x 5V USB-A outlets	6 x 12V DC outlets
Top Panel LED	x 1 (Green-Power Input Indicator)	
Operating Temperature	5~40°C	
Storage Temperature	-20~60°C	
Humidity	0~80%RH	
Dimensions (H x W x D) (mm)	20 x 85 x 60	
Weight (g)	150	

* It must use AC to DC 5V / 12V power adapter.

► Connection Pattern

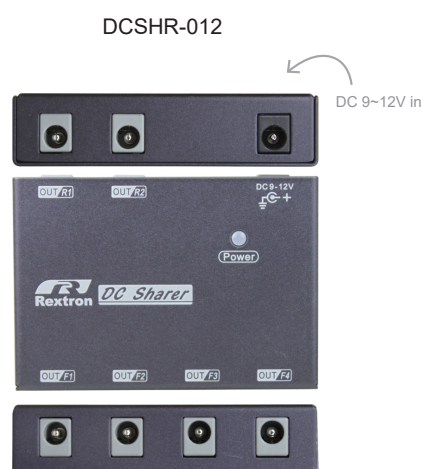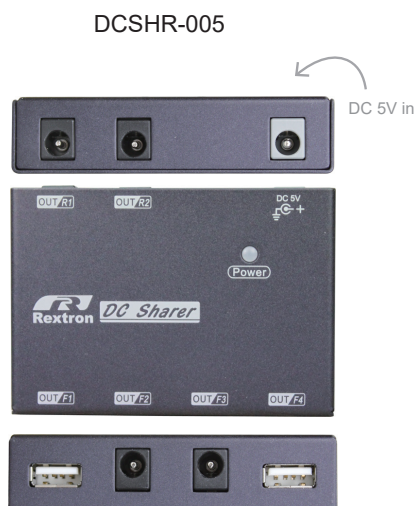

► Features

- Provide 6 DC power sources for the connected devices
- DC power cord application eliminates the use of the extension cord keeping your server room neat
- Top panel LED indicates inputting power to the unit
- Fool-Proof plugs, avoid short-circuitry
- 4 DC / 2 USB plus 2 DC receptacles on the front panel and 2 DC receptacles on the rear panel make connections easy to reach
- USB ports allow to charge 2 high power mobile devices (e.g. iPad, smart phone) simultaneously (DCSHR-005 only)
- Enable charging iDevices / Android & Other USB devices at their maximum designed speed (DCSHR-005 only)



► Related Products

- Power Hub converts AC (100~240V) to DC (5V / 12V) and provides 8 DC / USB receptacles for KVM / AV products and USB peripherals.

Model	Input	Output
PHQ-60BU	AC 100-240V	4 x 12V DC outlets 4 x 5V DC outlets or 4 x 5V USB-A
PHQ-60FU		8 x 5V DC outlets or 4 x 5V USB-A
PHQ-60T		8 x 12V DC outlets



Cables for DC sharer
0.5M / 1.5M